



This on the orthographic view

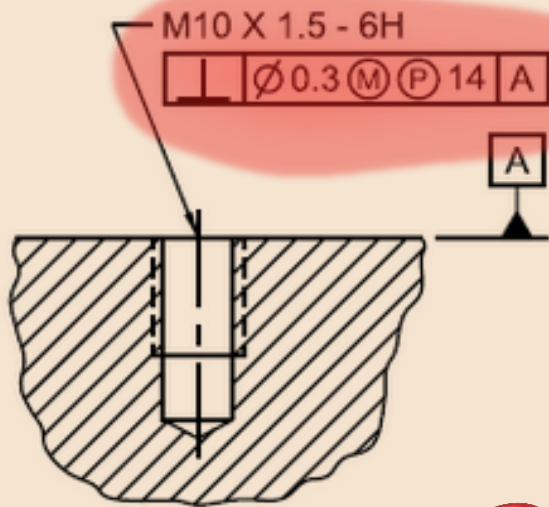

Means this

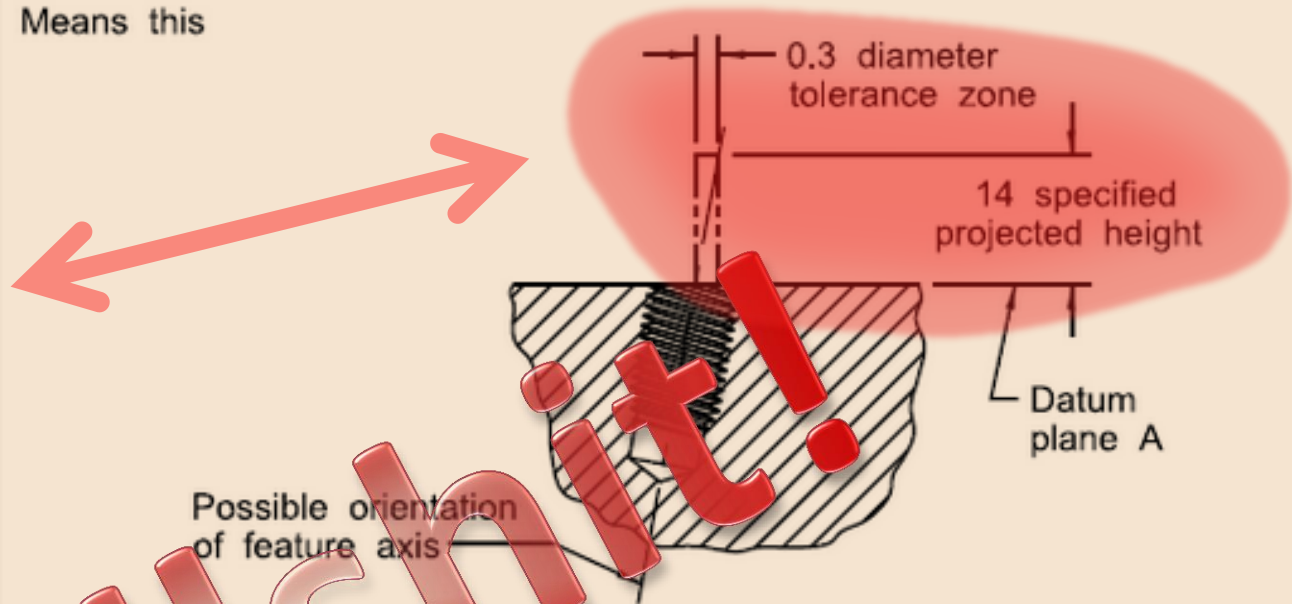

Possible orientation of feature axis

Where the thread profile is at MMC, the feature axis shall be within a cylindrical zone 0.3 diameter that is perpendicular to and projects from datum plane A for the 14 specified height. The projected feature axis shall be within the specified tolerance of orientation over the projected height.

Note: A threaded hole may be located and defined from its thread profile at MMC. Consideration should be given to the additive tolerance that results from the departure from MMC. The centering effect of the fastener at assembly may reduce or negate such added tolerance.

10.4.1
 9.3.2