


13.06.2013  
M. Mues

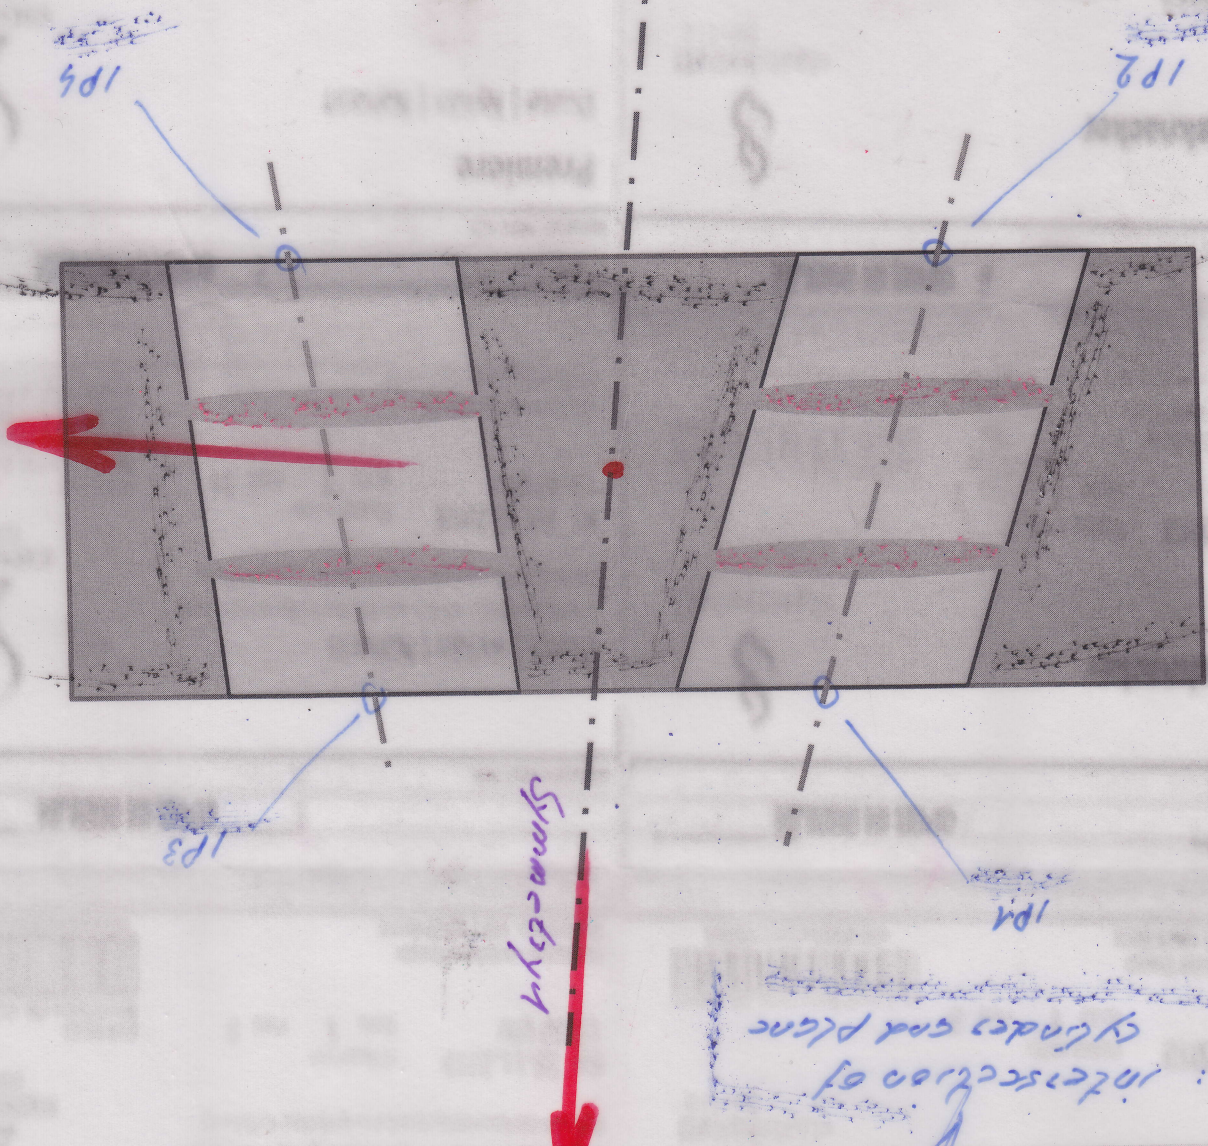

Shape Of Zone:  Tolerance: 0.5000

Features List

| Element | X        | Y       | Z       | Post-Tol |
|---------|----------|---------|---------|----------|
| datumB  | -19.0000 | -0.0000 | -0.0000 | 0.5000   |
| datumC  | 19.0000  | -0.0000 | -0.0000 | 0.5000   |

Best Fit Method:  Best Fit  Translation

Best Fit:  Best Fit  Rotation

| IP  | X   | Y | Z   |
|-----|-----|---|-----|
| IP4 | 13  | 0 | 10  |
| IP2 | 15  | 0 | -10 |
| IP3 | -15 | 0 | 10  |
| IP1 | -15 | 0 | -10 |

Rotation Angle:  Translation In X:

Primary Datum:  Secondary Datum:  Tertiary Datum:

Symmetry:

Clear Datum Referer:  Spe

Bore Pattern:  Best Fit:

Shape Of Zone:  Tolerance: 0.5000